


## ● Conductivity electrodes

Code	Body	Poles	CC	°C	size	
SK10B SK10T SK10T3S SK10Y	General Graphite	Epoxy	2	1 cm <sup>-1</sup>	0...80	110xØ12
SK12T	Low cond. Graphite	Epoxy	2	0.1 cm <sup>-1</sup>	0...80	110xØ12
SK20B SK20T SK20T3S SK20Y	General Platinum	Glass	2	1 cm <sup>-1</sup>	0...110	110xØ12
SK21T SK21T3S SK21Y	Low cond. Platinum	Glass	2	0.1 cm <sup>-1</sup>	0...110	110xØ12
SK23T	High cond. Platinum	Glass	2	10 cm <sup>-1</sup>	0...110	130xØ12
SK24T	Micro elec. Platinum	Glass	2	1 cm <sup>-1</sup>	0...100	110xØ6
SK27B SK27T	Flat Surface Graphite	Epoxy	2	1 cm <sup>-1</sup>	0...80	110xØ12
SK40T	4-pole Graphite	Epoxy	4	0.5 cm <sup>-1</sup>	0...80	110xØ15
SK41T	4-pole Platinum	Glass	4	1 cm <sup>-1</sup>	0...100	110xØ12
SK43T	4-pole High cond. Platinum	Glass	4	10 cm <sup>-1</sup>	0...100	110xØ12

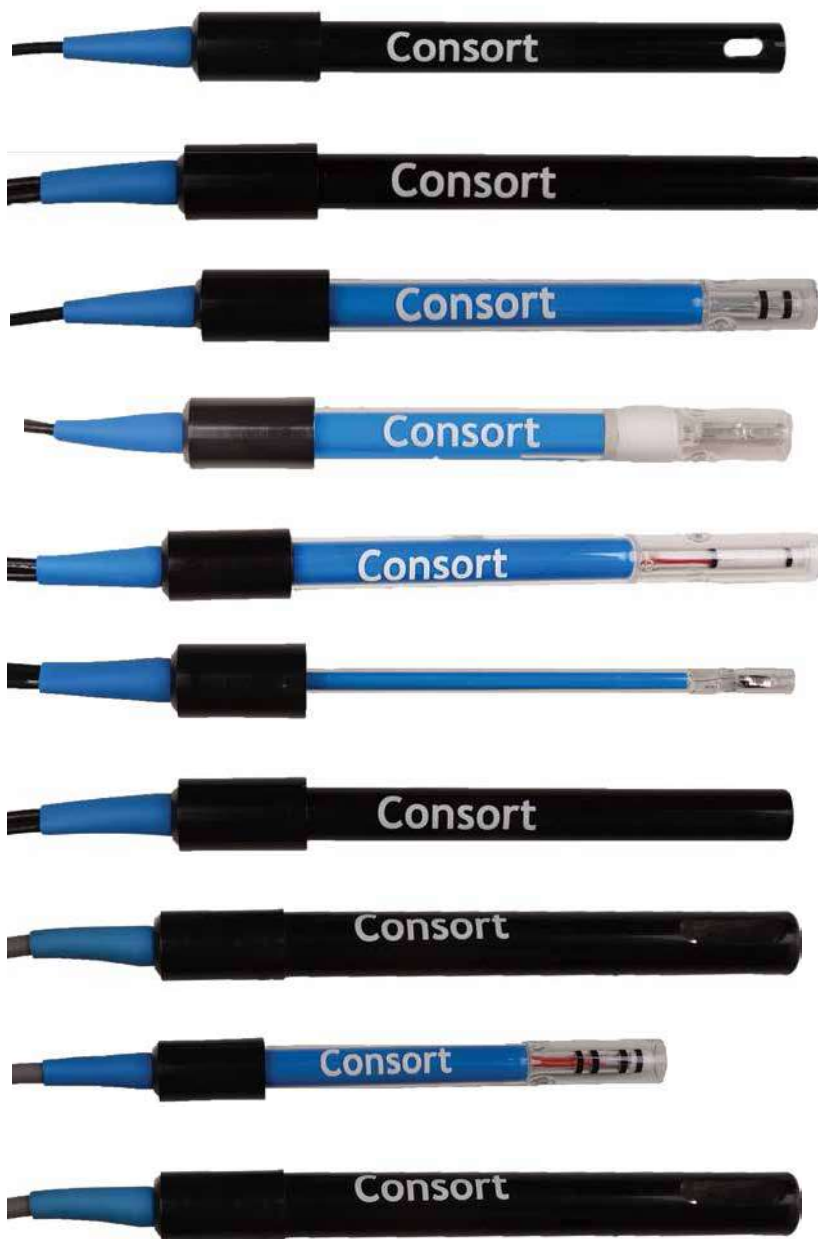

## ● Temperature Compensator

Code	Body	type	°C	size
ST10N	Teflon coated stainless steel	Pt1000	-30...+130	110xØ4
ST20N	Glass	Pt1000	-30...+130	110xØ8
ST21Y	Glass	Pt1000	-30...+130	110x12

